
Outdoor Dome Housing

Unit: [Inch]

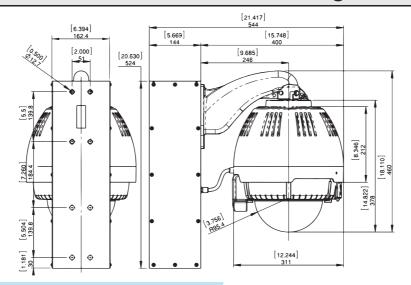

[Standard Wall Mount W Type]

Capsule C=Clear T=Tinted **Housing Color** Nothing=Standard(Silver) A-ODW7WW 6 Disits registerd model name(UL&PSE) After 7 digits shows optional specifications

Blower Heater

2=Type 24VAC Blower and Heater Installed 12=Type 12VDC Blower, Heater installed 12(POE+) = Type 12VDC Blower, Heater and POE Splitter installed in housing *1, *2 12(POE+M) = Type 12VDC Blower, Heater and POE Splitter installed in housing and Midspan are packed in product box *1,*2

"Optional" Two-Coat system for Metal Parts(Bracket) for corrosion protection*3 Nothing = Standard One Coat by UV resistant polyester powder coat

-TC = "Optional" Two-Coat -TTC= Optional Three Coat*4

(OW) = Off-White

(DB) = Dark Brown

Specification Operating Environment Outdoor Operating Temperature -50°C~+45°C(24VAC/12VDC 50W) -30°C~+45°C (POE 60W) IP Rate IP55 (Vent Holes "Open") IP66 (Vent Holes "Closed" with provided Rubber) Max Wind Load 66m/sec Housing = PC/ABS UL94 V-0 Housing Top = Aluminum Materials Wall Mount Bracket = Aluminum Capsele = PC (Light Loss of Tinted Approx.70%) Color Standard Silver: Silver (Housing) Black (Housing Top & Bracket) Offwhite: RAL9002 Similar Darkbrown: Munsell 5YR2/1.5 Silmilar Weight Approx. 13.6kg (30lbs) Washer Box 6.8kg (15lbs) Recomended Screw 3/8" or M8~M10 Stainless Screw x 4 (Not included in product) **Power Consumption** Type 24VAC 2) 25W (50W for Cold Area* Confirmation Necessary) of Heater Type 12VDC 6W, 12W, 25W, 50W (*Confirmation Necessary) Type POE 6W or 25W (*Confirmation Necessary) *Before Ordering, obtain our confirmation for Camera and Midspan Power. Blower & Heater Blower 35°C(ON) 27°C(OFF) Auto or Continous by Jumper Connector Nidec 12VDC 0.5W Blower EUDC12D8 x 2pcs.=1W (Optional) Heater 4.4°C(ON) 16°C(OFF)Auto Only Compliance RoHs, PSE, CE, RCM, UL(File# E313815)

- Due to size and specification of camera splitter may not be installed in housing.
- As regards the specification of both Splitter and Midspan, you are requested to obtain our confirmation in advance before ordering.
- Optional" Two-Coat system comprises 1coat = powder coating primer (Epoxy base) and Top coat = UV resistant (Polyester base) powder coating based on our standard.
- Before Two Coat(-TC), Cation Electrodeposition will be added. (For details, click our website top "Anti-Corrosion Paint")

